




SECTION C-C




SECTION E-E

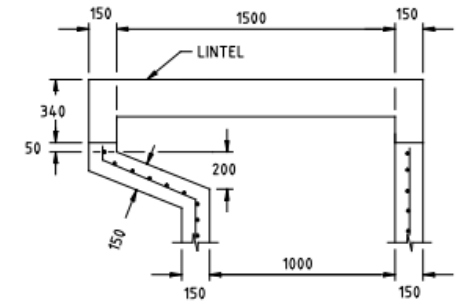

SECTION D-D

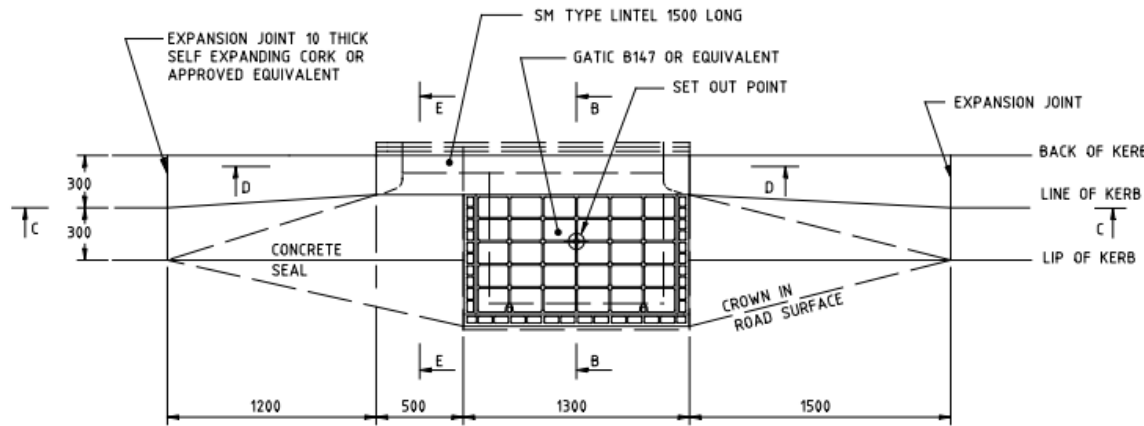

PLAN

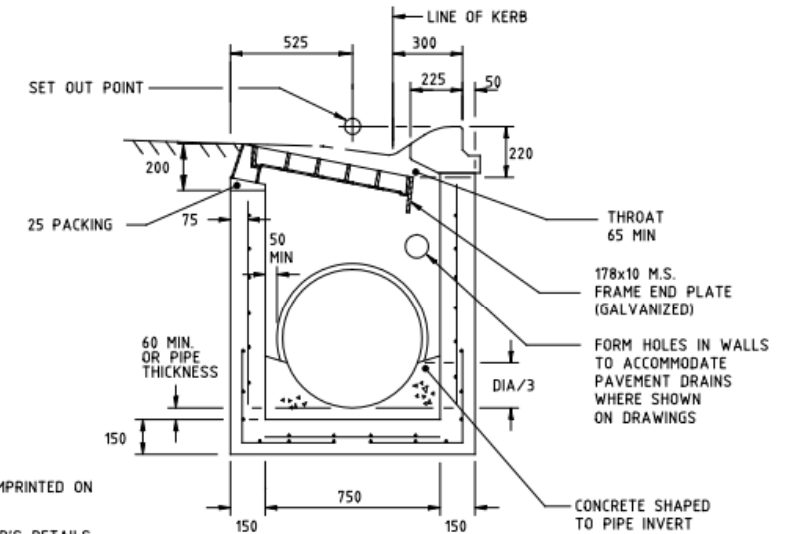

SECTION B-B

NOTES:

- HAUNCHING MAY BE REQUIRED FOR PIPES OVER 450 DIA, REFER TO PIT SCHEDULE FOR SIZES OF SPECIFIC PITS. PITS WITH HAUNCHING IN TWO DIRECTIONS REQUIRE SPECIAL STRUCTURAL DESIGN.
- PIT REINFORCEMENT - F92. LAPS TO BE 300 MINIMUM. CLEAR COVER TO BE 50 MINIMUM. CORNER RETURN REINFORCEMENT MAY BE FABRIC OR EQUIVALENT BARS. BARS GRADE 400Y & FABRICS TO COMPLY WITH AS/NZS 4671. CONCRETE SHALL BE NORMAL-CLASS N32 STANDARD STRENGTH GRADE OR HIGHER COMPLYING WITH THE REQUIREMENTS OF AS 1379. EXPOSURE CLASSIFICATIONS UP TO AND INCLUDING B1.
- PITS DEEPER THAN 1000 SHALL BE FITTED WITH STEP IRONS. REF SD 1041.
- CAST IRON COVER SUBJECT TO HEAVY VEHICLE LOADING ARE REQUIRED TO SUPPORT A TEST LOAD OF 210 kN IN ACCORDANCE WITH VICROADS' "INTERIM TEST METHOD FOR TEST LOADING PIT COVERS, LINTELS AND LIDS."
- CAST IRON COVER AND FRAME TO BE INSTALLED AS ONE UNIT.
- CONCRETE INFILL FOR COVER AND FRAME SHALL BE N32 AT 28 DAYS, WITH 10 MAX SIZE AGGREGATE. TAMP AND PENCIL VIBRATE.
- EACH COVER SHALL HAVE WEIGHT AND CAPACITY CLEARLY IMPRINTED ON THE TOP.
- PRECAST UNITS MAY BE CONSTRUCTED TO THE MANUFACTURER'S DETAILS. THE DESIGN SHALL COMPLY WITH THE AS 5100 BRIDGE DESIGN AND THE FOLLOWING ADDITIONAL REQUIREMENTS:
 - COMBINED FACTORED LATERAL PRESSURE AT ANY POINT AT THE ULTIMATE LIMIT STATE SHALL BE NOT LESS THAN 25 kPa.
 - ADEQUATE DRAINAGE SHALL BE PROVIDED TO PIT WALLS TO AVOID HYDROSTATIC PRESSURE.
 - VERTICAL LOAD 210 kN APPLIED ANYWHERE ON PIT.
 - MINIMUM REINFORCEMENT AREA SHALL BE 150 mm²/m.
 - CONCRETE SHALL BE NORMAL-CLASS N32 STANDARD STRENGTH GRADE OR HIGHER COMPLYING WITH THE REQUIREMENTS OF AS 1379. EXPOSURE CLASSIFICATIONS UP TO AND INCLUDING B1.

DISCLAIMER (APRIL '23): THIS DRAWING IS IN THE PROCESS OF BEING UPDATED. FOR ALL STRUCTURAL REQUIREMENTS REFER [BRIDGE TECHNICAL NOTE \(BTN\) 033: STRUCTURAL REQUIREMENTS FOR REINFORCED CONCRETE DRAINAGE PITS](#). GEOMETRIC DIMENSIONS SHOWN ON THIS DRAWING MAY BE USED AS A GUIDE AND MODIFIED WHERE NECESSARY TO ACHIEVE COMPLIANCE.

E			
D			
C	J.K.	1/7/05	AS 1962 & 1964 SUPERSEDED BY AS/NZS 4671. AUSTRALIAN BRIDGE CODE 1998 SUPERSEDED BY AS 5100 BRIDGE CODE
B	J.C.	1/2/98	AMENDMENT TO NOTES 2, 6 & 8, CONCRETE STRENGTH GRADES.
A	J.C.	1/9/94	SET OUT POINT, GEN NOTE 6, NOTES 2, 4, 6, 8 & 9, SECTION B-B, INVERT DEPTH.
ISSUE	APP'D	DATE	AMENDMENT

GENERAL NOTES	
1. STANDARD PIT DIMENSIONING & SETTING OUT DETAILS	SD 1001
2. UNHAUNCHED PITS	SD 1011
3. HAUNCHED PITS	SD 1021
4. STEP IRONS	SD 1041
5. LINTELS	SD 1061
6. ALL DIMENSIONS ARE IN MILLIMETRES	

DESIGNED	PRINCIPAL ROAD DESIGN ENGINEER
APPROVED	16.9.94 <i>J. Cunningham</i>
CATALOG PROJECT FILENAME	PRED s0dgnnew sd-1291c.dgn

SCALE	HOR OF METRES	VER
NOT TO SCALE		

3 PROSPECT HILL ROAD, CAMBERWELL, VICTORIA 3163. PHONE NO. (03) 9411 8225 FAX NO. (03) 9411 8229

STANDARD DRAWING				
SIDE ENTRY PIT (SM KERB)				
CAST IRON COVER IN ROAD - 1.5 METRE INLET				
FILE NO.	CONTRACT NO.	SHEET NO.	DRAWING NO.	ISSUE
			SD 1291	C