


DETAIL AT PAVEMENT DRAIN

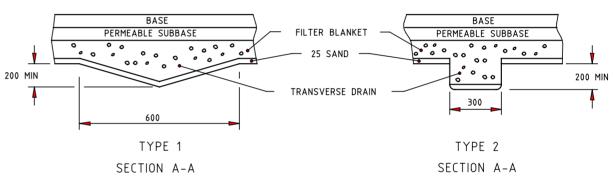

FILTER BLANKET TRANSVERSE DRAINS

NOTE:

- ON GRADES WHERE FLOW PATHS WITHIN FILTER BLANKETS WOULD OTHERWISE EXCEED 50m, FILTER BLANKET TRANSVERSE DRAINS SHALL BE PROVIDED.
- FILTER BLANKET TRANSVERSE DRAINS MAY DISCHARGE INTO BATTERS OR DRAINS.
 THEY SHALL NOT BE CONNECTED TO DRAINS AT LOCATIONS WHICH WOULD PERMIT
 WATER TO ENTER THE PAVEMENT FROM THE DRAIN. (ie. AT DOWNSTREAM END OF
 DRAINS).

E				GENERAL NOTES / CROSS REFERENCES	DESIGNED PRINCIPAL ROAD		STANDARD DRAWING
D				1. SUBSURFACE DRAIN - TYPES SD 1601 2. SUBSURFACE DRAIN - PITS SD 1611	DESIGN ENGINEER APPROVED	vicroads design	PAVEMENT DRAIN
В	J.B		UNDERSIDE OF THE BASE LAYER.	3. SUBSURFACE DRAIN - LOCATION SD 1621 4. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS SHOWN OTHERWISE	Taminglen 1-7-95		ALTERNATIVE METHODS
L A	J.C.	1/7/95	GENERAL NOTE 4 ADDED.		CATALOG: PRED	COMPUTER FILE SCALE HOR NOT TO SCALE	FILE NO. CONTRACT NO. SHEET NO. DRAWING NO. ISSUE
ISSUE	APP'D	DATE	AMENDMENT		PROJECT: sddgnnew	sd-1622b.dgn METRES VER	SD 1622 B